


INSTALLATION INSTRUCTIONS & PARTS DIAGRAM


ELIASON® *Easy Swing*® Double Action 3/4" and 1-1/2" Doors

STANDARD HARDWARE

GASKET ON THE
150-118G ONLY

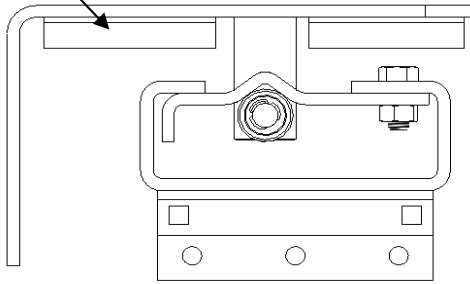

**JAMBS MUST BE SQUARE AND PLUMB
A MINIMUM OF 3-1/2 INCH WIDE JAMBS
REQUIRED TO MOUNT HARDWARE**

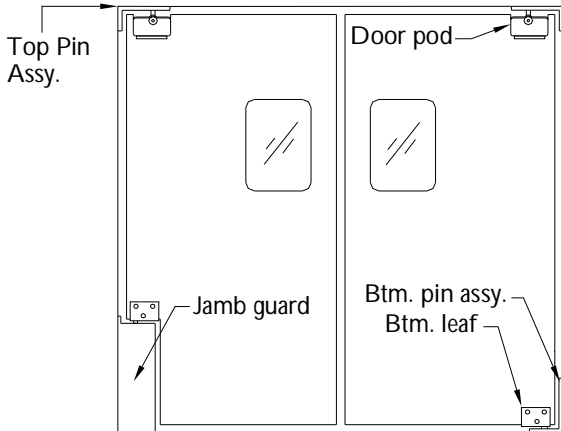

NOTE: Bottom pin assembly
must be secured to floor.

1. Measure width and height of framed opening and compare with dimensions given at time of ordering. (This model was cut to the dimensions given by the customer and is not adaptable to fit into a different size of opening.)
2. Position bottom pin on floor and center on side jamb. Secure to jamb using (4) screws supplied. Bottom pin must be secured to floor using (2) 3/8" x 2-1/4" anchors supplied. Top pin assembly secures to top with (4) screws and side jamb with (2) screws supplied.
3. If a jamb guard is supplied, refer to the installation instructions supplied with the jamb guard.
4. Slip door over bottom pin and lift slightly to slide door pod over bearing plate. Line up holes and insert bolts supplied. Partially install lock nuts, move door to closed position and secure lock nuts.
5. Install covers and secure. (4) screws supplied per door.

NOTE: HOLLOW METAL JAMBS DRILL 7/32 PILOT HOLE FOR 9 GA. AND THINNER MATERIAL

150-118	-- Top Pin Assy (SCP,PMP,HCP,P-11+)	→	
150-118G	-- Top Pin Assy (HCG,HFG,SCG,FCG)		
	(6) 1/4" - 20 x 1" phil. flt hd. thread cutting screws		
	(6) #14 - 1-1/2" phil. flt hd. sheet metal / wood screws		
100-50	-- Bearing Plate with (2) 5/16 - 18 screws, (2) 5/16 - 18 lock nuts		
170-58	-- 3/8" Axle		
170-60	-- (2) Rollers		
170-28	-- Klipring		
100-1105	-- (2) Aluminum Covers, (4) screws (SCP-2,4,5,7; SCG/FCG-1,5)	→	
100-1105SS	-- (2) SS Covers, (4) screws (SCP-3,6,8; SCG/FCG-3)		
170-182XX	-- (2) ABS Covers, (4) screws (HCP/G, HFG, PMP, P-11+, SCP-11)		
150-47	-- Bottom Pin Assy (4) of each fastener listed under 150-118 or 150-118G & (2) floor anchors (150-47 NOT included if jamb guards are used)	→	

ELIASON CORPORATION www.eliasoncorp.com

P.O. Box 2128 Kalamazoo, MI 49003
Telephone: 269-327-7003/800-828-3655
Fax: 269-327-7006/800-828-3577
email: doors@eliasoncorp.com

P.O. Box 1026 Woodland, CA. 95776
Telephone: 530-662-5494/800-828-2655
Fax: 530-662-5192/800-662-5192
email: doors@eliasonwest.com

ELIASON CORP. © 2006